

Sondas de temperatura y accesorios.


Temperature sensors and accessories.



Sondas NTC / NTC probes (-50°C +100°C)




AKO-14901	L = 1,5m	Vaina y cable de poliolefina modificada
AKO-14902	L = 2,0m	Sheath and cable of modified polyolefin
AKO-14903	L = 3,0m	
AKO-14906	L = 6,0m	

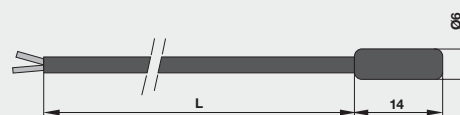

Sonda NTC de pincho / Tapered probe NTC sensor (-50°C +100°C)




AKO-14915	L = 3m	Pincho de inoxidable con 3m de cable de silicona
		Stainless steel sheath
		Silicone rubber cable + steel sheath braided

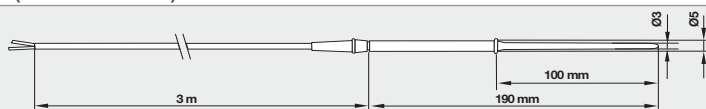

Sondas PTC / PTC probes (-50°C +150°C)




AKO-155801	L = 1,5m	Vaina de latón plateado
AKO-155802	L = 2,0m	Cable de silicona
AKO-155803	L = 3,0m	Plated brass sheath
AKO-155807	L = 7,0m	Silicone rubber cable
AKO-155815	L = 15,0m	
AKO-155830	L = 30,0m	

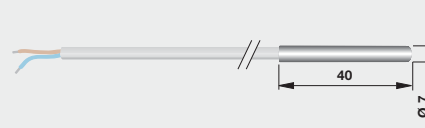


Sondas Pt 100 vaina de acero inoxidable / Pt 100 probes stainless steel sheath




AKO-15585 (-50°C +150°C)	L = 2,0m	Cable silicona
		Silicone rubber cable
AKO-15587 (-50°C +350°C)	L = 2,0m	Fibra vidrio + trenza
		Fiber glass + braided

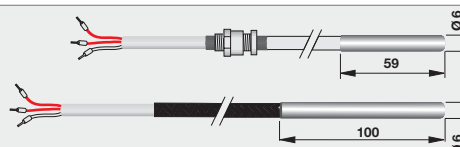

Sondas PTC 100 (M12) vaina acero inoxidable / PTC 100 probes (M12) stainless steel sheath

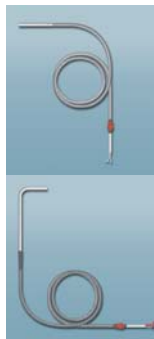


AKO-15584 (-40°C +180°C)	L = 10,0m	Cable silicona
		Silicone rubber cable
AKO-15585A (-40°C +180°C)	L = 2,0m	Cable silicona
		Silicone rubber cable
AKO-15595 (-40°C +200°C)	L = 1,5m	Cable silicona + trenza
		Silicone rubber cable + braided
AKO-15596 (-40°C +600°C)	L = 1,5m	Cable silicona + trenza
		Silicone rubber cable + braided

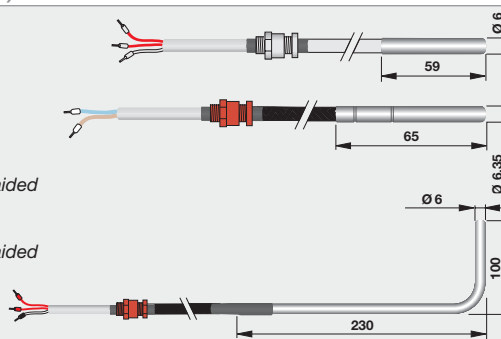

Transformador de alimentación / Power supply transformer




AKO-15590	120-230/12V, 3VA
------------------	------------------



Protector frontal / Front protector



AKO-14910	Plástico transparente para equipos de fijación panelable
	In transparent plastic for panel mounting units



Convertor de alimentación / Power supply converter




AKO-15589	14 a 30V ≈ /12V ~, 5VA
------------------	------------------------



Vaina para alojar sondas en depósitos / Sheath for housing sensors in tanks



AKO-155908	Material: Acero inoxidable
	Stainless steel material



Cable para prolongación de sondas / Sensor extension cable



AKO-15586	Cable de 3 x 0,5mm ² con aislamiento + trenza de cobre + cubierta de PVC.
	3 x 0,5mm ² cable with insulation + copper braid + PVC sheath.